



US009452523B2

(12) **United States Patent**
Hokanson

(10) **Patent No.:** **US 9,452,523 B2**

(45) **Date of Patent:** **Sep. 27, 2016**

(54) **ADJUSTABLE AUGER RACK WITH FLIGHTING SECUREMENT FACILITATING VERTICAL USE, STORAGE AND/OR TRANSPORT OF AUGER OR DRILL BIT(S)**

USPC 211/13.1
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2010/0307827	A1*	12/2010	Piipponen	175/52
2012/0234780	A1*	9/2012	Hokanson	211/69
2013/0213913	A1*	8/2013	Kohlgruber	211/85.8
2013/0220949	A1*	8/2013	Sargent	211/4
2015/0209954	A1*	7/2015	Hokanson	

FOREIGN PATENT DOCUMENTS

DE 3400069 A1 * 7/1985 A47F 7/19

* cited by examiner

Primary Examiner — Jerry Redman

(74) *Attorney, Agent, or Firm* — Steven Rinehart

(57) **ABSTRACT**

A rack is disclosed, adapted to facilitate efficient transport, use and storage of augers, including foundation augers. The rack comprises a frame and a plurality of upwardly rising tower assemblies which grip or lock the helical flighting on earth augers. In various embodiments, components of the rack are adjustable to accommodate differing diameters of the auger, differing angles of incline of flighting, and differing heights of augers and their flighting.

14 Claims, 7 Drawing Sheets

(71) Applicant: **Craig Richard Hokanson**, Clearfield, UT (US)

(72) Inventor: **Craig Richard Hokanson**, Clearfield, UT (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 405 days.

(21) Appl. No.: **14/164,060**

(22) Filed: **Jan. 24, 2014**


(65) **Prior Publication Data**

US 2015/0209955 A1 Jul. 30, 2015

(51) **Int. Cl.**
B25H 3/00 (2006.01)
B25H 3/04 (2006.01)
E21B 19/14 (2006.01)

(52) **U.S. Cl.**
CPC **B25H 3/003** (2013.01); **B25H 3/04** (2013.01); **E21B 19/14** (2013.01)

(58) **Field of Classification Search**
CPC B25H 3/003; B25H 3/04; E21B 19/14

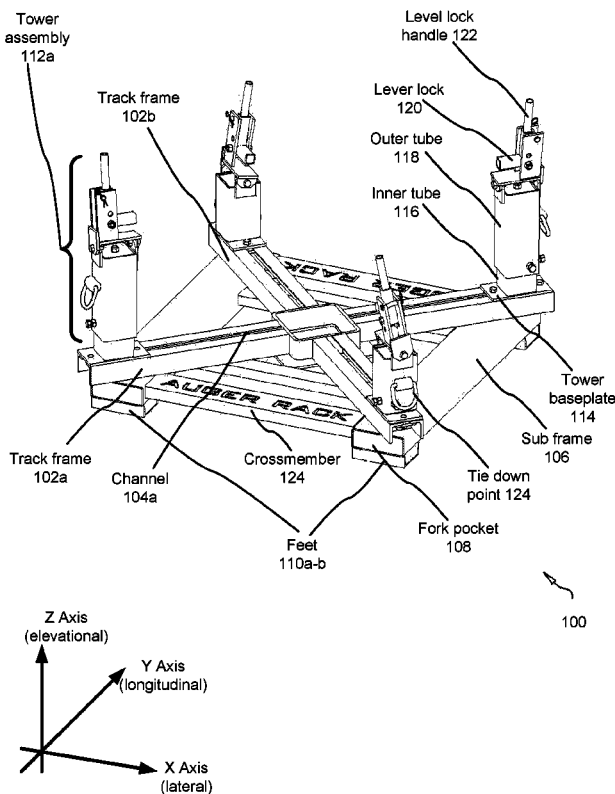

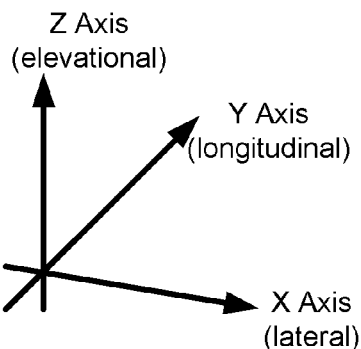
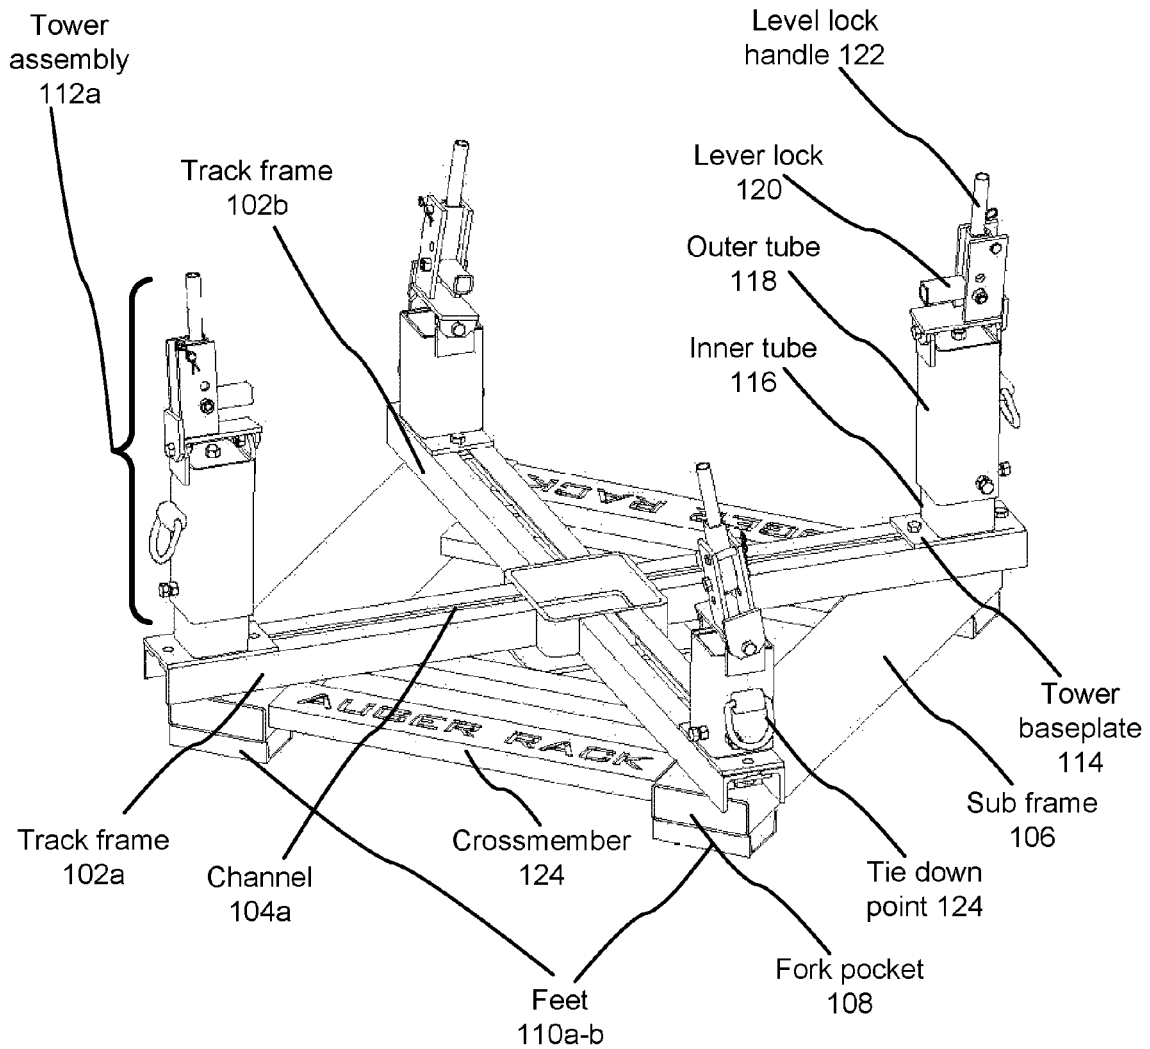
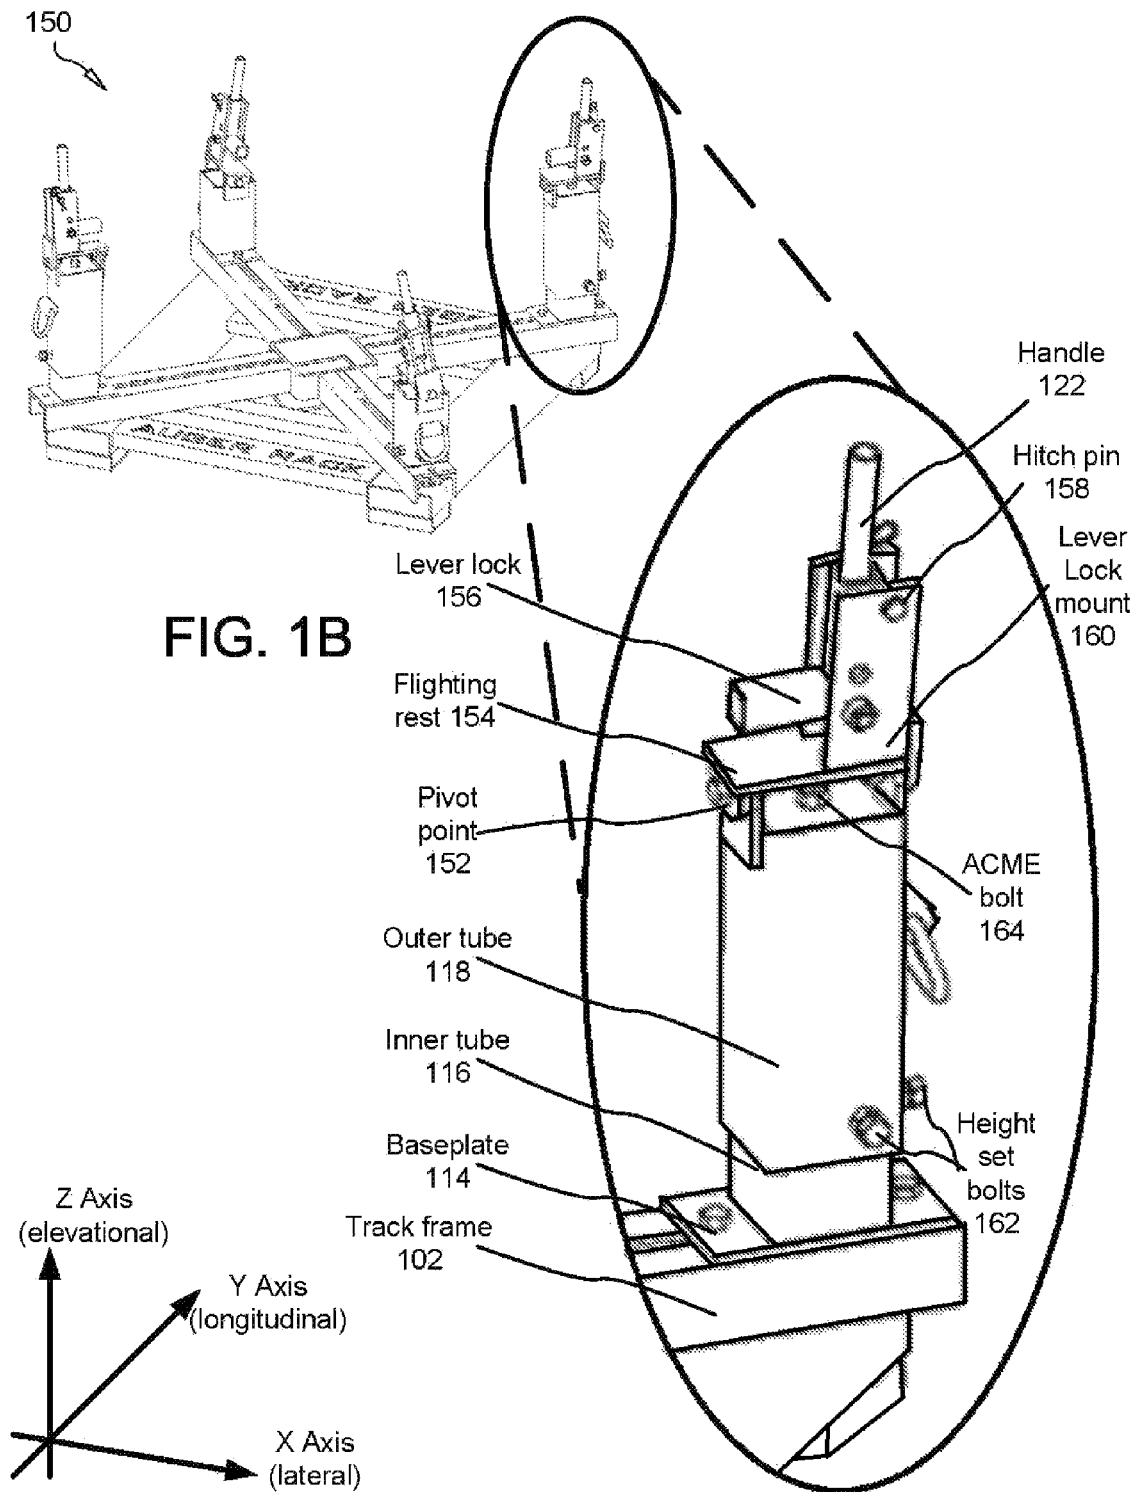


FIG. 1A



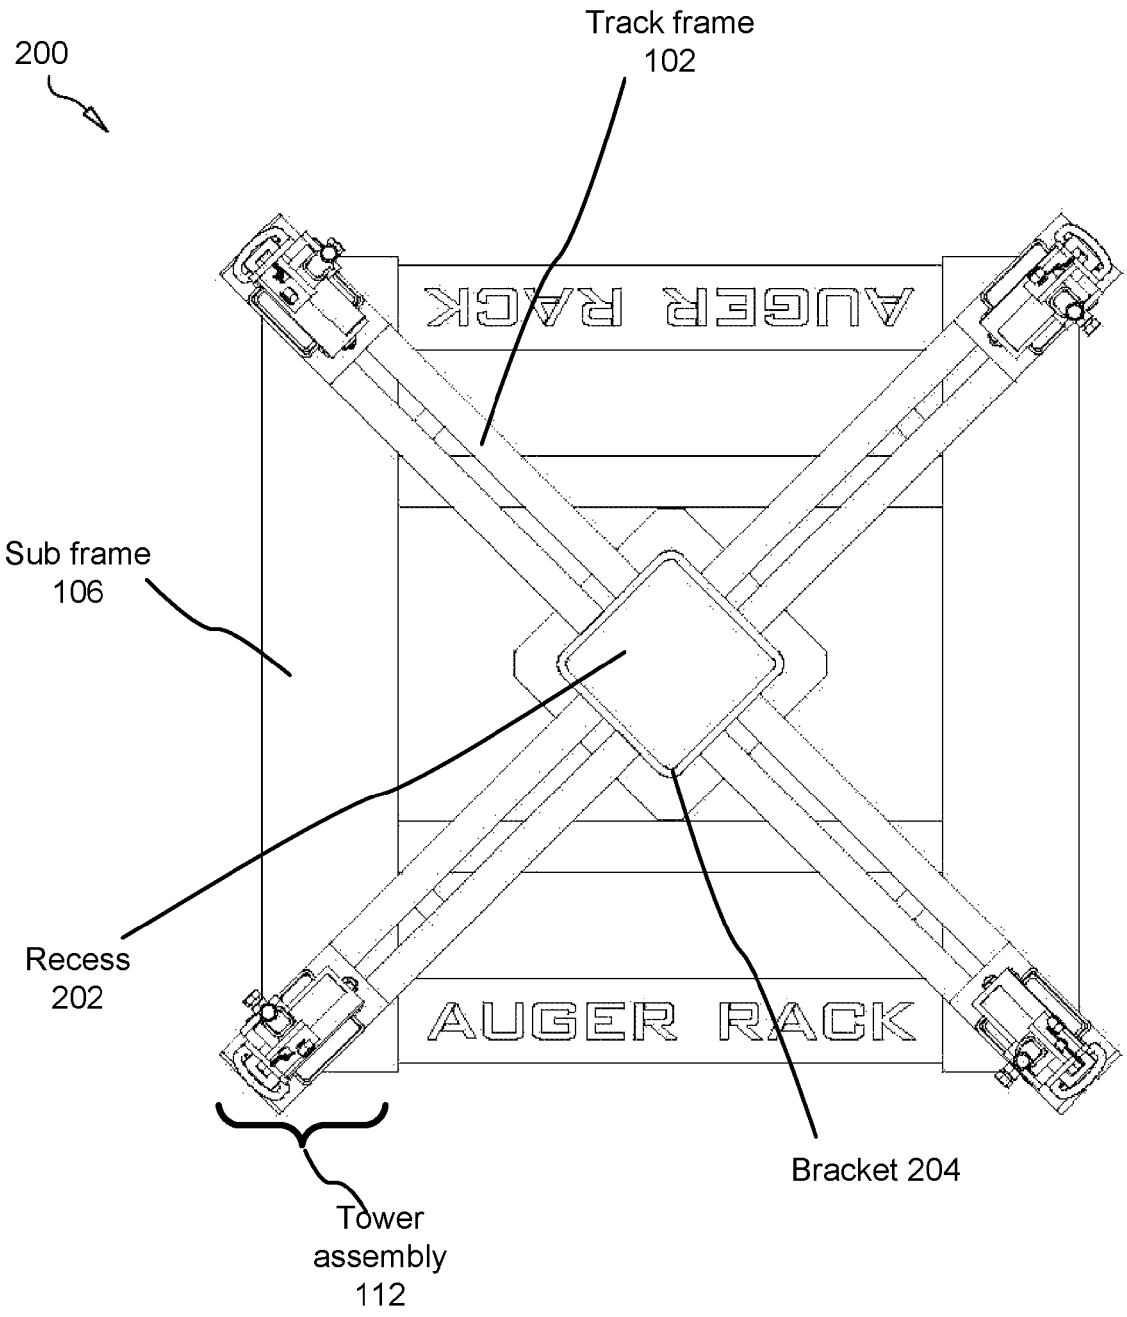


FIG. 2

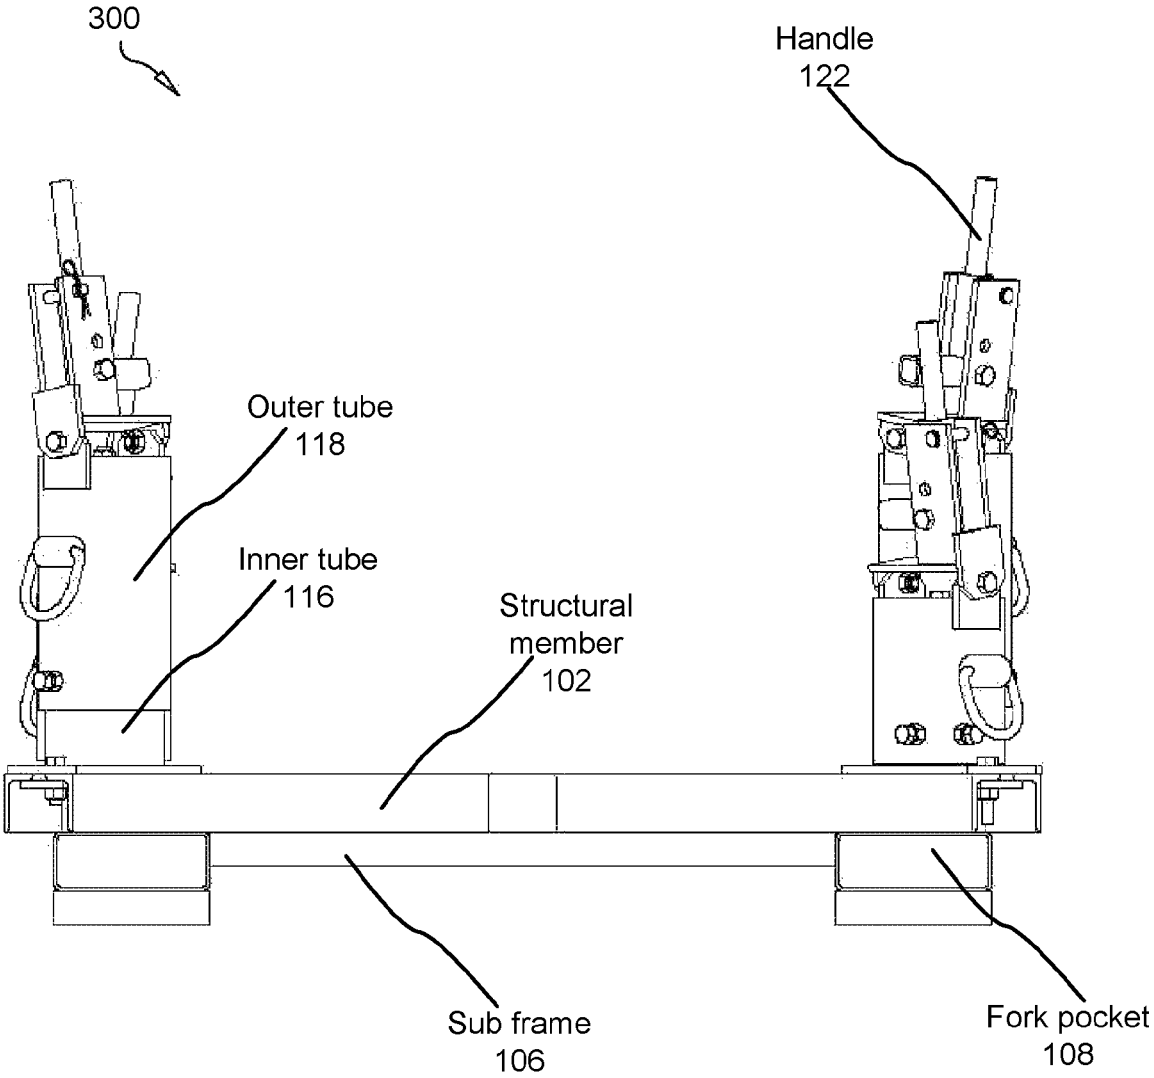


FIG. 3

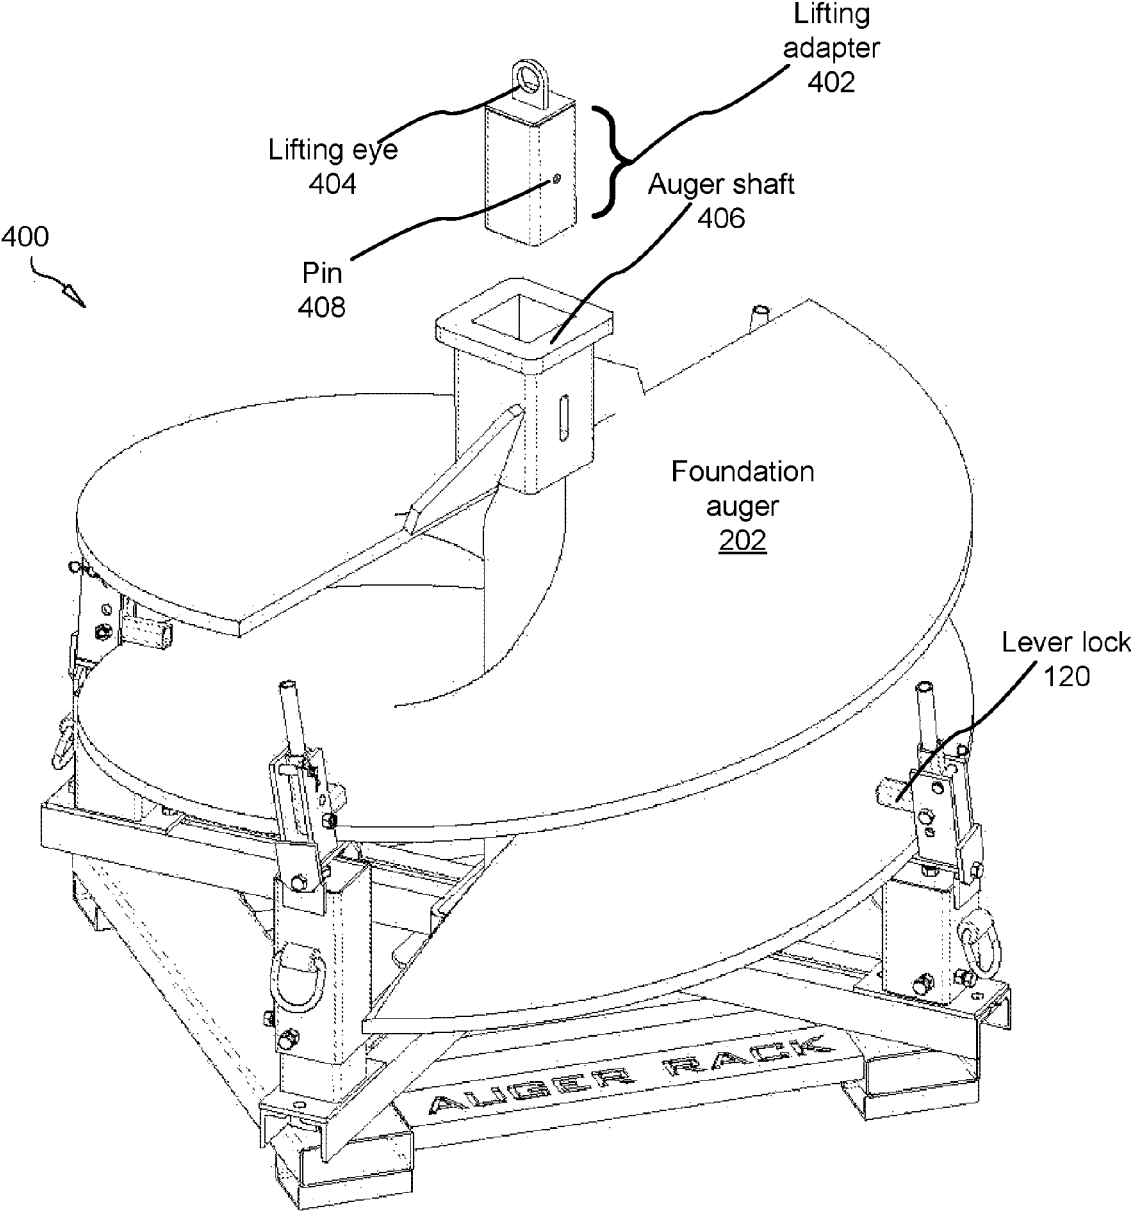


FIG. 4

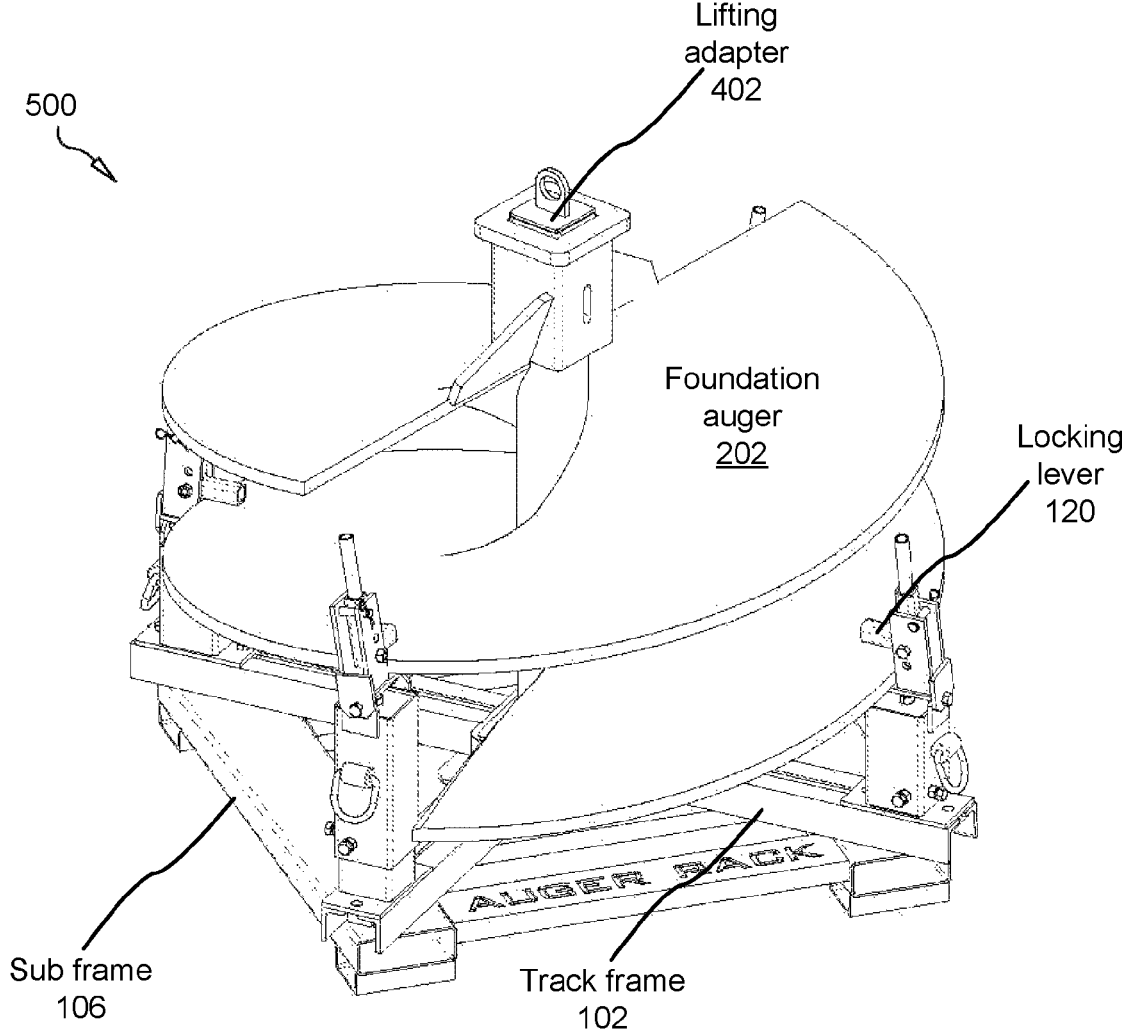


FIG. 5

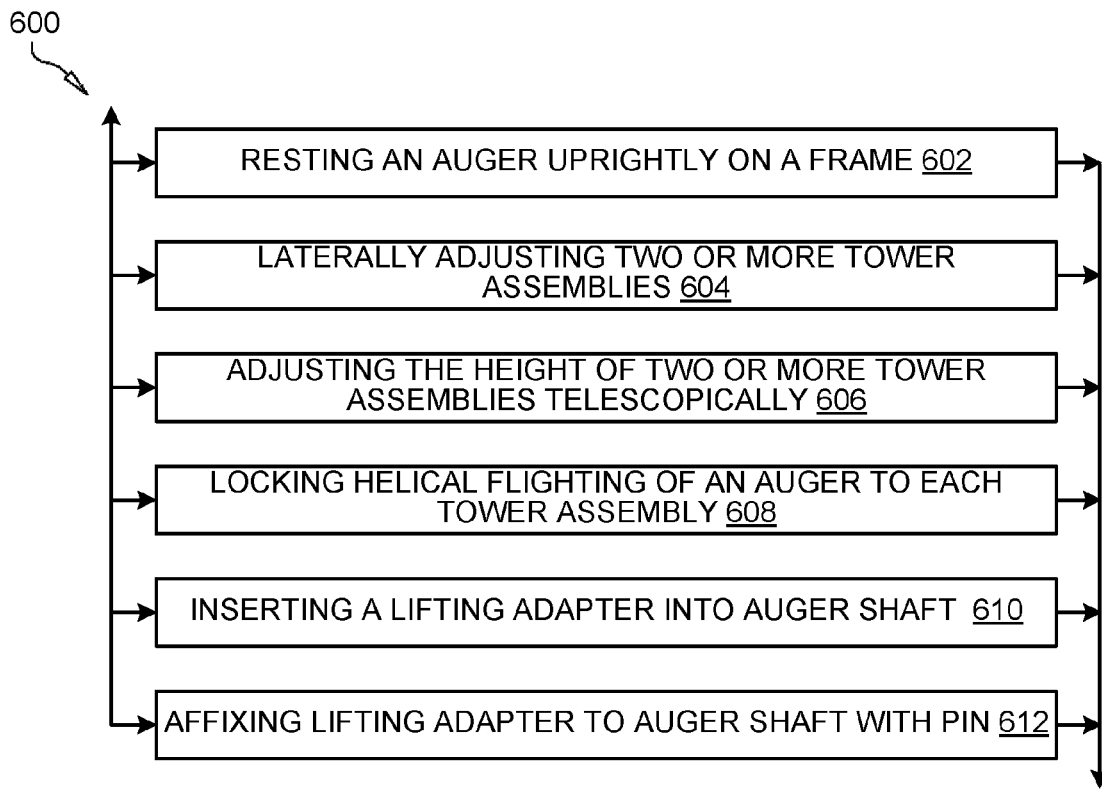


FIG. 6

**ADJUSTABLE AUGER RACK WITH
FLIGHTING SECUREMENT FACILITATING
VERTICAL USE, STORAGE AND/OR
TRANSPORT OF AUGER OR DRILL BIT(S)**

CROSS-REFERENCE TO OTHER
APPLICATIONS

This patent application claims priority to, and incorporates, U.S. provisional patent application Ser. No. 14/795,782 entitled "Auger Rack with Flighting Securement Facilitating Vertical Use, Storage and Transport of Auger or Drill Bits" filed on Jan. 25, 2013 for Craig Richard Hokanson.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to construction implements, and more particularly relates to an implement for transportation, use and storage of heavy augers.

2. Description of the Related Art

Foundation augers, utility auger and general purpose augers are well-known in the art, and often used in constructing deep foundations for industrial or commercial buildings. Foundation augers, like all earth augers, comprise helical flighting used in drilling to extract earth and aggregate from a ground surface in a construction area. In the case of foundation auger, the dimension of the auger are much greater than with other augers used to drill wells or for other application. Foundation augers can weigh thousands, or even tens of thousands, of pounds. Foundation augers can be difficult or impossible to orient upright once they have fallen out of the upright position.

Because foundation augers vary in size, shape, weight and the incline angle of their flighting, simple universal rack for storing foundation augers do not exist in the art, much less a universal rack able to store foundation augers of a wide variety of sizes and shapes.

Foundation augers must be detachably affixed to a large drive motor, which suspends them, which drive motor is usually connected to a mechanized vehicle, drilling stations, and/or other machine known to those of skill in the art, including a skid steer, backhoe, excavator, mini excavator, compact track loader, Bobcat®, truck-mounted Derrick digger, pressure digger, or any of a plethora of various types of tractors and track vehicles.

Because of their size, foundation auger are particularly difficult to safely transport and store, and there exists no efficient means in the art of storing or securing foundation augers in an upright position so they can be handled, managed and moved vertically.

There is a need in the art for safer and more efficient apparatus and method of securing large foundation augers. It is therefore desirable that an auger rack be provided which facilitates ease of vertical auger transport, storage, use and interchange.

SUMMARY OF THE INVENTION

From the foregoing discussion, it should be apparent that a need exists for an auger rack for vertical auger transport, storage, use and interchange. Beneficially, such an apparatus would overcome many of the difficulties with prior art by providing a safer means for securing, transporting, storing, using and interchanging a plurality of augers by a single operator.

The present invention has been developed in response to the present state of the art, and in particular, in response to the safety problems and needs in the art that have not yet been fully solved by currently available apparatus. Accordingly, the present invention has been developed to provide a rack for vertically securing a foundation auger, the rack comprising: a frame comprising: two or more track frames between 0.1 meters and 10 meters in length, the track frames comprising elongated structural components formed from a rigid metallic substance, each track frame defining a track through which an adjustable tower assembly travels; wherein each track frame is oriented to converge diagonally across an x axis and across a y axis toward a common center point of the rack; two or more upwardly rising adjustable tower assemblies, each assembly slidably affixed to a track frame, each adjustable tower assembly comprising: an inner tube; an outer tube, wherein the inner tube slides within the outer tube along a z axis telescopically such that a height of the tower assembly is adjustable; a flighting rest affixed to one of the inner tube and outer tube, the flighting rest for supporting a lower surface of helical flighting on an auger; a locking mechanism for locking the helical flighting of the auger in place; wherein each adjustable tower assembly slides along a track frame.

In some embodiments, the common center point of the rack is defined by a recess separating the track frames, the recess for securing a tip of an auger from lateral movement. In other embodiments, the rack further comprise one or more fork pockets. The rack may further comprise one or more feet for engaging a ground surface.

The rack may further comprise a sub frame affixed beneath the track frames on the z axis. The rack may further comprise a plurality of tie down points. Each tower assembly may comprise a baseplate slidably affixed to a track frame such that the tower assemblies may be adjusted inward or outward to accommodate augers of different diameters.

Each tower assembly may further comprise a cantilevered locking lever hingedly affixed to the tower assembly such that the locking lever secures a top surface of helical flighting of an auger. The flighting rest may be hingedly affixed to the tower assembly such that the flighting rest may be angled to correlate to the incline of helical flighting of an auger.

The rack, in some embodiments, further comprises a detachable lifting adapter, the detachable lifting adapter for facilitating craning of the rack and auger, the lifting adapter comprising: an inner sleeve for insertable engagement of an auger shaft, the inner sleeve defining an aperture for receiving a pin traversing the inner sleeve and a corresponding aperture in the auger shaft, the pin interlocking the lifting adapter and auger shaft; and a lifting eye affixed to the inner sleeve for hoisting the auger and rack overhead.

The rack may further comprise one or more crossmembers for increased stability of the rack. The track frame may be oriented in one of x-shaped fashion and y-shaped fashion.

These features and advantages of the present invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the advantages of the invention will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments that are illustrated in the

3

appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings, in which:

FIG. 1A is a side elevational perspective view of an adjustable pressure digger rack in accordance with the present invention;

FIG. 1B is a side elevational perspective view of an adjustable pressure digger rack, showing an exploded view of a tower, in accordance with the present invention;

FIG. 2 is an upper perspective view of an adjustable pressure digger rack in accordance with the present invention;

FIG. 3 is a side perspective view of an adjustable pressure digger rack in accordance with the present invention;

FIG. 4 is a side elevational perspective view of an adjustable pressure digger rack in accordance with the present invention;

FIG. 5 is a side elevational perspective view of an adjustable pressure digger rack in accordance with the present invention; and

FIG. 6 is a flow chart illustrating the steps of a method of storing a foundation auger on a rack in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Reference throughout this specification to “one embodiment,” “an embodiment,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in one embodiment,” “in an embodiment,” and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

Furthermore, the described features, structures, or characteristics of the invention may be combined in any suitable manner in one or more embodiments. In the following description, numerous specific details are provided to convey a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention may be practiced without one or more of the specific details, or with other methods, components, materials, and so forth. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.

FIG. 1A is a side elevational perspective view of an adjustable pressure digger rack **100** in accordance with the present invention. The rack **100** comprises a track frame **102**, a track frame **102b**, a channel **104a**, a sub frame **106**, a fork pocket **108**, feet **110a-b**, a tower assembly **112**, a tower baseplate **114**, an inner tube **116**, an outer tube **118**, a lever lock **120**, a lever lock handle **122**, and a tie down point **124**.

The rack **100** as shown is for use, storage and/or transport of foundation augers, utility augers, or general purpose auger comprising helical flighting. The rack **100** secures the auger at its flighting in an upright position, and the rack **100** is adjustable to accommodate augers of various shapes, sizes, and weights.

The term “auger” as used herein is defined to include earth augers, foundation augers, and drill bits used in industrial or

4

construction applications. Thus, the term “auger rack” defines a rack for suspending an auger in an upright position.

In various other embodiments, the components of the rack **100** are welded, bolted or fastened together. The rack **100** may also be designed as an X-frame as shown in attached drawing/sketch, which X-frame may be fixed or adjustable to accommodate bits of different diameters or widths. The frame may be square, rectangular, circular, ovoid, octagonal, triangular or otherwise shaped.

In the shown embodiment, the track frames **102** emanate outwardly across a plane formed by the x and y axes from a common center point on the rack **100**. In the shown embodiment, that common center point is defined by a square bracket defining a hollow recess for receiving the tip of an auger suspended in the rack **100**. This square bracket is affixed to each of the track frames **102**. This bracket may be circular or otherwise shaped. The track frames **102** may define a recess at the common center point. A tip lowered into the recess also serves to lower the center of gravity of the rack **100** and auger.

The tower assemblies **112** extend upwards in orthogonal fashion from the track frames **102** along the z axis, and are further described below. The tower assemblies **112** rising orthogonally from the track frames **102** may be telescopic or otherwise adjustable. The tower assemblies **112** may slide in a channel, track, rail or guide member in the track frame **102**, snap in slots or grooves on a track frame **102**, or may be bolted or pinned through a track frame **102** via any other adjustable means known to those of skill in the art.

The tower baseplate **114** slidably connects the tower assembly **112** to the track frame **102**, and the baseplate **114** may comprise any component that connects or interconnects the tower assembly **112** to a track, channel, or guide member, including a track connector.

The tower assembly comprises a number of components described further below in relation to FIG. 1B, including flighting rests **154** having fixed or an adjustable pitch surfaces of between 0°-65°. In other words, the flighting rests **154** may tilt while affixed to the tower assembly **112**. The flighting rests **154** towers may be spring-biased to rest in one upright position.

The flighting rests **154** may be lockable in one tilted position, and may or may not tilt as part of the flighting tower. The flighting rests **154** may comprise any mechanism for affixing, clamping, pinning, fastening or attaching the rack to the flighting.

Clamps on the tower assemblies **112** may be adjustable to clamp down on flighting of differing thicknesses and may also be adjustable to clamp down with adjustable amount of pressure or force.

The tower baseplates **114** may be substantially square, circular, triangular, polygonal, or the like. The baseplates **114** may comprise tread, or texturing, to prevent slippage of the tower assemblies across the track frames **102**.

Fork pockets may or may not be incorporated into the rack **100** or sub frame **106** of the rack. Baseplates or feet may or may not be incorporated into the sub frame **106** of the rack.

The rack **100** could be permanently designed into a truck bed itself or into a trailer, perhaps in connection with other racks **100**, allowing for multiple augers to be transported with or behind the truck. The rack **100** may be designed to be secured by brackets to the truck or trailer. The rack **100** may be designed with a cup, receptacle, or cylinder member having an open top for receiving a bit inserted into the rack, truck or trailer which is then secured by cross bars disposed over flighting or flighting locks.

5

Each of the components of the sub frame **106**, the tower assembly **112**, and the track frames **102**, may comprise elongated, hollow steel tube. Each of these components may alternatively comprise rods, beams, I-beams, angle beam, bar stock, H-beams, C-beams (i.e. channel), plates, pipes, or other structural members. The members may define a number of holes, bores, or apertures drilled through the members for securing aftermarket components to the rack **100**. Each member may be manufactured from polymers, wood, metals, alloys, and the like. Each member may be curved, bent, or angled along either their y-axis, z-axis, or an orthogonal x-axis.

The rack **100** may comprise numerous lifting points and/or tie down points **124** for allowing for crane rigging to pick the rack **100** and a secured auger directly from a ground surface. The shown embodiment includes inverted U-shaped members, but may comprise I-beams, tubes, pipes, and the like.

The sub frame **106** comprises structural members, such as the crossmember **124**, affixed to one another to form a chassis or frame underlaying the track frames **102**. In the shown embodiment, the sub frame **106** is square. In other embodiments, the sub frame **106** may be otherwise shaped.

The feet help to keep gravel and dirt out of the fork pockets **108** and sub frame **106**.

FIG. 1B is a side elevational perspective view of an adjustable pressure digger rack **150**, showing an exploded view of a tower, in accordance with the present invention. The tower assembly **112** comprises a baseplate **114**, an inner tube **116**, an outer tube **118**, fighting rest **154** connected at a pivot point **152**, a lever lock **156**, a handle **122**, a hitch pin **158**, a lever lock mount **160**, an adjustment bolt **164** which may be an acme bolt, and height set bolts **162**.

The inner tube **116** is affixed to the baseplate **114**, and travels within an outer sleeve **118** disposed above the baseplate **114** on the z axis.

The outer tube **118** extends telescopically away from, and upwardly, from the baseplate **114**, thus providing means of adjusting the height of the tower assembly **112**.

The inner tube **116** and outer tube **118** may comprise tubes, pipes, bar, rods, cylinders, and other elongated components as known to those of skill in the art.

The fighting rest **154** is hingedly connected to the tower assembly **112**. In the shown embodiment, the fighting rest **154** is connected at a pivot point **152** on a bracket affixed to the outer sleeve **118** with an adjustment bolt **164**. The fighting rest **154** thus tilts to conform to the inched angling of helical fighting on an auger secured by the rack **150**.

The fighting rest **154** may affixed pivotably to the outer tube **118** or inner tube **116** or using means known to those of skill in the art, including an adjustment bolt **164**. The fighting rest may be joined, coupled, welded in place at a desired angle or pitch, or otherwise affixed using means known to those of art to the outer or inner tube.

Height set bolts **162** are adjustable to clamp the outer tube **118** to the inner tube **116** and fix the height of the tower assembly **112**.

A lever lock mount **160** is affixed to the fighting rest **154**, which lever lock mount **160** is hingedly affixed to a lever lock **156**. The lever lock **156** is rotated from a vertical to a horizontal position by an operator gripping the handle **122**. The lever lock **156** is locked over the top surface of helical fighting on an auger, then held in place by a hitch pin **158** inserted through apertures or bore holes in the lever lock mount **160**.

FIG. 2 is an upper perspective view of an adjustable pressure digger rack **200** in accordance with the present

6

invention. The pressure digger rack **200** comprises a track frame **102**, a sub frame **106**, a tower assembly **112**, a recess **202**.

The sub frame **106** and tower assembly **112** are described above in relation to FIGS. 1A-1B.

The recess **202** is defined by the bracket **204** interjoining the track frames **102**.

The tower assemblies **112** slide along the channel **104** or track defined by the track frames **102**. The tower assemblies are adjustable inward or outward to accommodate augers **202** of varying sizes, shapes, weights and dimensions.

FIG. 3 is a side perspective view of an adjustable pressure digger rack **300** in accordance with the present invention. The pressure digger rack **300** comprises a sub frame **106**, a fork pocket **108**, track frame **102**, an inner tube **116**, an outer tube **118**, and a handle **122**.

As shown.

FIG. 4 is a side elevational perspective view of an adjustable pressure digger rack in accordance with the present invention. The pressure digger rack **400** comprises a lever lock **120**, a foundation auger **202**, and a lifting adapter **402** defining a pin hole **408** and lifting eye **404**.

The foundation auger **202** is secured to the rack **400** properly in the shown embodiment. The lever lock **120** has been locked down horizontally over the top surface of the fighting of the auger **202**.

The lifting adapter **402** exists for facilitating craning or lifting overhead the foundation auger **202** and rack **400**. The lifting adapter **402** is detachable from the auger **202**. The lifting adapter **402** is insertable into the auger shaft **406** of the auger **202**, and connectable to the auger shaft **406** with a pin through the pin hole **408**.

The shaft **406** of auger **202** defines a recess commonly used to connect the auger **202** to a drive motor. The lifting adapter **402** comprises a pin hole **408** into which a pin is insertable. The pin hole **408** may comprise a recess, bore, aperture, or groove in the auger **202** shaft usually used for connecting the auger **202** to the drive motor. The pin which traverses the pin hole **408** also traverses the auger shaft **406**.

FIG. 5 is a side elevational perspective view of an adjustable pressure digger rack in accordance with the present invention. The pressure digger rack **500** comprises a sub frame **106**, track frame **102**, a locking lever **120**, a foundation auger **202**, and lifting adapter **402**.

FIG. 5 shows an auger **202** in secured position in the rack **500** with a lifting adapter **402** insertably connected to the auger **202**.

FIG. 6 is a flow chart illustrating the steps of a method **600** of storing a foundation auger on a rack in accordance with the present invention.

The method **600** begins **602** with resting a auger **202** uprightly on a metallic frame such that the tip of the auger **202** is resting within a recess defined by the frame, which recess prevents lateral movement of the tip of the auger **202**.

Adjusting **604** two or more tower assemblies **112** laterally on a track frame **102** such that the tower assemblies **112** abut, or nearly abut, helical fighting surrounding the auger **202**. The tower assemblies **112** are then secured in place to a track frame **102**.

Adjusting **606** the height of two or more tower assemblies telescopically such that a locking mechanism on the tower assembly **112** is roughly even on a z axis with adjacent helical fighting on an auger **202**.

Next the method **600** progresses as the fighting on the auger **202** is locked to, secured by, or affixed to the tower assembly **112** using means known to those skill in the art.

Inserting a lifting adapter **610** into the auger shaft **610** and securing **612** the lifting adapter to the auger shaft using a pin which traverses the lifting assembly and auger shaft.

Another step may include hoisting or lifting the rack and auger **202** from a ground surface using a crane, for lift, and the like.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A rack for vertically securing a foundation auger, the rack comprising:

a frame comprising:

one or more track frames between 0.1 meters and 10 meters in length, the track frames comprising elongated structural components, each track frame defining a track through which an adjustable tower assembly travels;

wherein each track frame is oriented to converge generally diagonally across an x axis and across a y axis toward a common point of the rack;

one or more upwardly rising adjustable tower assemblies, each assembly slidably affixed to one of the one or more track frames, each adjustable tower assembly comprising:

an inner tube;

an outer tube, wherein the inner tube slides within the outer tube generally along a z axis telescopically such that a height of the tower assembly is adjustable;

a fighting rest affixed to the tower assembly for supporting a lower surface of helical fighting on the auger;

a locking mechanism for securing the helical fighting of the auger.

2. The rack of claim **1**, wherein the common center point of the rack is defined by a recess separating the track frames, the recess for securing a tip of an auger from lateral movement.

3. The rack of claim **1**, further comprising one or more fork pockets.

4. The rack of claim **1**, further comprising one or more feet for engaging a ground surface.

5. The rack of claim **1**, further comprising a sub frame affixed to the track frames.

6. The rack of claim **1**, further comprising a plurality of tie down points.

7. The rack of claim **1**, wherein each tower assembly comprises a baseplate slidably affixed to one of the one or

more track frames such that the tower assemblies may be adjusted inward or outward to accommodate augers of different diameters.

8. The rack of claim **1**, wherein each tower assembly further comprises a cantilevered locking lever hingedly affixed to the tower assembly such that the locking lever secures a top surface of helical fighting of the auger.

9. The rack of claim **1**, wherein the fighting rest is hingedly affixed to the tower assembly such that the fighting rest may be tilted to correlate to an incline of helical fighting of the auger.

10. The rack of claim **1**, further comprising a detachable lifting adapter, the detachable lifting adapter for facilitating craning of the rack and auger, the lifting adapter comprising:

an inner sleeve for insertable engagement of an auger shaft, the inner sleeve defining an aperture for receiving a pin traversing the inner sleeve and a corresponding aperture in the auger shaft, the pin interlocking the lifting adapter and the auger shaft; and

a lifting eye affixed to the inner sleeve for hoisting the auger and rack overhead.

11. The rack of claim **1**, further comprising one or more crossmembers for increased stability of the rack.

12. The rack of claim **1**, wherein the track frames are oriented in one of x-shaped fashion and y-shaped fashion.

13. A rack for vertically securing a foundation auger, the rack comprising:

a frame comprising:

two or more track frames between 0.1 meters and 10 meters in length, the track frames comprising elongated structural components;

wherein each track frame is oriented to converge diagonally across an x axis and across a y axis toward a common center point of the rack;

two or more upwardly rising adjustable tower assemblies, each assembly slidably affixed to one of the two or more track frames, each adjustable tower assembly comprising:

an inner tube;

an outer tube, wherein the inner tube slides within the outer tube along a z axis telescopically such that a height of the tower assembly is adjustable;

a fighting rest affixed to one of the inner tube and the outer tube, the fighting rest for supporting a lower surface of helical fighting on the auger;

a locking mechanism for locking the helical fighting of the auger in place;

wherein each adjustable tower assembly slides along a track frame.

14. The rack of claim **13**, wherein each track frame defines one or more apertures for adjusting lateral positioning of the tower assemblies on the rack, wherein each tower assembly is affixed to one of the two or more track frames via an aperture.

* * * * *